




Medium Series

P145V

Telescopic platform with movable cage boom
mounted on van or chassis



Standard equipment



Extra equipment/Options



The range of available options depends on the vehicle.



Technical specifications*

Max. working height:	14.6 m
Max. outreach:	9.7 m
Cage load capacity:	230 kg
Total weight:	5500 kg
Payload capacity:	1300 kg
Platform rotation:	460°
Safe working angle:	2°/5°
Isolation:	1000V

* Exact specifications vary based on the individual build and chosen options.


Description

P145V is in the Medium Series due to the gross vehicle weight from 5 tons, but the platform itself has the specifications of the Light Series. It is light but still very stable due to its high-strength steel construction and the angles on the boom profile. P145V has all the necessary features as well as a 110° movable cage boom, the most essential sensors, and a max. cage capacity of 230 kg.

Additional specifications:

Standard wheelbase. 110° movable cage boom. OD-type outriggers. Electric/hydraulic control. Subframe and outriggers are galvanized. Home function. Operating without outriggers. Outriggers can be deployed even when the platform is not in transport position. Electronic cabin protection. Various flashlights. Horizontal outreach is adjusted according to cage load - from 100 to 230 kg.

Diagrams

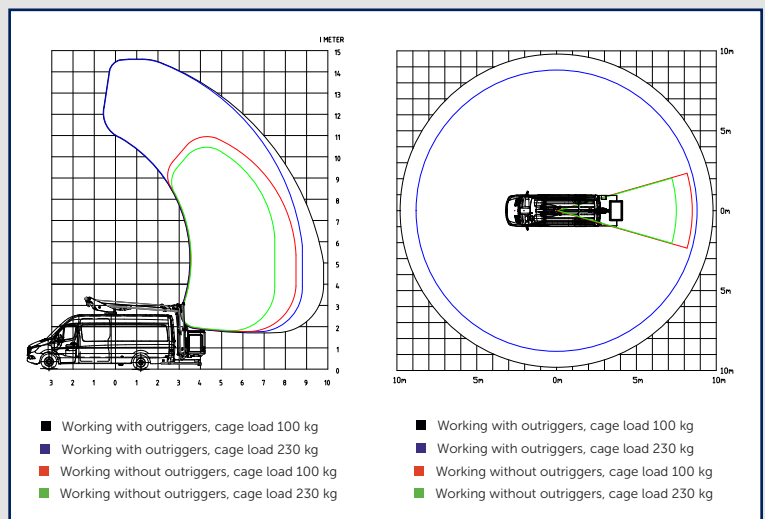

Images



The images in this literature may show options. Danilift A/S reserves the right to change technical information without notice.